


# COMPACT cabinet cooler

for sealed electrical enclosures

**Noren Products** manufactures air-to-air and air-to-water heat exchangers for cooling electrical panels without letting contaminants inside (including wash down, and hazardous locations). Compact Cabinet Coolers prevent failures and downtime caused by overheating electronics. Noren units are easy to install, low maintenance, Freon free and cost a fraction of air-conditioning. NEMA 12, 3R, 4, 4x, Stainless Steel, UL, cUL, CE available.

special units available  
**hazardous location**  
**wash down**  
**stainless steel**  
**corrosion resistant**  
**military**  
**weather proof**

filter kits available




aluminum



disposable

**Standard Models**   **Std Weight (lbs.)**   **Efficiency (Watts/°C)**   **Rating\* (BTU/hr)**   **Amps @ 115V**   **Fan/size**   **Dimensions**  
**Height**   **Width**   **Depth**


## DROP-IN MODELS

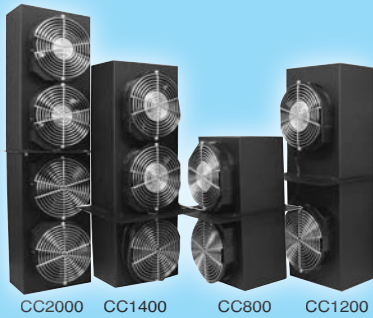

CC2000   CC1400   CC800   CC1200

CC100	6	7.2	500	0.4	3-3.6"	11 5/8	4	4 1/2
CC200	6	16.5	1100	0.4	2-4"	11 1/2	5 1/8	4 5/8
CC500	11	35.2	2400	0.6	2-6"	15	7 3/4	7
CC800	16	55.2	3800	0.6	2-6"	15	7 3/4	7
CC1200	18	75.0	5100	0.6	2-6"	22	7 3/4	7
CC1400	20	75.0	5100	0.9	3-6"	22 1/2	7 3/4	7
CC2000	28	110.4	7500	1.2	4-6"	30	7 3/4	7

## FLUSH MOUNT MODELS

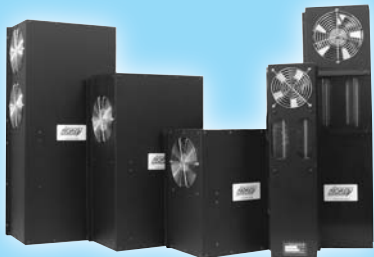

CC2500F   CC1300F   CC900F   CC400F   CC600F

CC254F	8	16.5	1100	0.4	2-4"	12 7/8	12	4
CC400F	10	20.4	1400	0.4	2-4"	22 1/2	6 1/4	4
CC450F	9	21.0	1400	0.4	2-4"	12 1/2	8	5 5/16
CC600F	14	49.4	3300	0.6	2-6"	30	8 3/4	4
CC900F	16	66.0	4500	0.6	2-6"	15	13 7/8	7 7/8
CC1300F	22	75.0	5100	0.6	2-6"	22	13 7/8	7 7/8
CC2500F	30	104.0	7100	1.2	4-6"	29	13 7/8	7 7/8
CC4000F	60	200.0	13700	2.4	8-6"	58	13 7/8	7 7/8

## BELOW AMBIENT - AIR TO WATER MODELS



CC3060   CC2060   CC3260   CC6360

CC2060	9	24.5	3350	0.2	1-4"	22 1/2	6 1/4	4
CC3060	13	68.8	9300	0.3	1-6"	30	8 3/4	4
CC3260	13	62.7	8600	0.3	1-6"	13 7/8	12	7 7/8
CC6360	32	159.7	21800	0.9	3-6"	29	13 7/8	7 7/8
CC9000	79	417.0	57000	2.4	8-6"	70 1/2	23 3/4	8

\* Typical performance rating mounted to a metal uninsulated 72" x 36" x 24" cabinet at 20°C ΔT to ambient air temperature for air-to-air models, or 40°C ΔT cabinet to coolant temperature for air-to-water. Models employing 4" fan sizes are rated on a 24" x 24" x 16" enclosure, the CC100 is rated on a 14" x 12" x 8" enclosure.



650.322.9500  
 FAX 650.324.1348  
**NORENPRODUCTS.COM**

Noren Products | sales@norenproducts.com | 1010 O'Brien Drive, Menlo Park, CA 94025