


CC6360 TYPE 12 COMPACT CABINET COOLER AIR-TO-WATER FLUSH-MOUNT MODEL

Model	Weight	Rating @ 40°C ΔT BTU / hr	Amps Current Draw at 115 volts AC	Fan Size	Dimensions-Inches (H x W x D)
CC6360	32 lbs	21,800	0.9	3 x 6"	29 x 13-7/8 x 7-7/8

Efficiency: 159.7 Watts / °C ΔT based on average internal cabinet temperature.

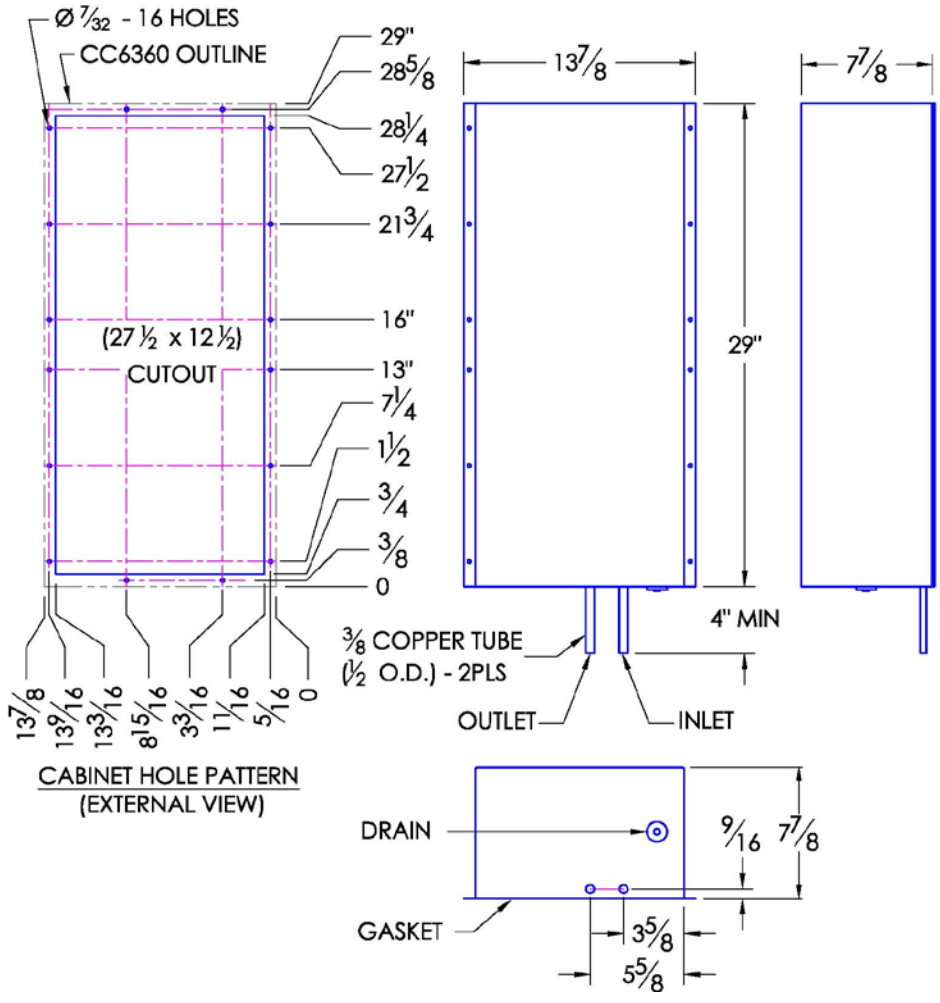

- ### SPECIFICATIONS
- UL Listed for TYPE 12 environments.
 - CC6360 Rated cooling: 6,388 Watts mounted to an uninsulated 72" x 36" x 24" Cabinet with 1 GPM of water at 20°C, 40°C ambient air and 60°C cabinet air temperature.
 - Designed for surface mounting on the outside of cabinet.
 - Housing is aluminum (color is black).
 - External water inlet and outlet connections.
 - Equipped with mounting gasket to maintain air tight seal.
 - Available with AC (115 & 230V) and DC (12, 24, & 48V) fans. DC version includes junction box, consult website.
 - Vertical mounting only.
 - Coolant water pressure: Pressure tested to 100 psi. Safe working pressure is 60 psi.
 - Recommended coolant flow rate (gallons per minute): 1 GPM
 - 11. For design, quote, and sizing assistance: call (866) 936 - 6736.**

Subject to change without notice.




 UL File #SA9567 Proudly made in USA ISO 9001:2008 FM 554949


Noren Products, Inc.
 1010 O'Brien Drive
 Menlo Park, CA 94025
 (650) 322 - 9500
www.norenproducts.com

CC6360 TYPE 12

CCS-PBD-7.2.2-883345-A