


# COMPACT cabinet cooler

Heat Exchangers by Noren Products for sealed electrical enclosures

**Noren Products** manufactures air-to-air and air-to-water heat exchangers for cooling electrical panels without letting contaminants inside (including wash down, and hazardous locations). Compact Cabinet Coolers prevent failures and downtime caused by overheating electronics. Noren units are easy to install, low maintenance, Freon free and cost a fraction of air-conditioning. NEMA 12, 3R, 4, 4x, Stainless Steel, UL, cUL, CE available.

special units available  
 hazardous location  
 wash down  
 stainless steel  
 corrosion resistant  
 military  
 weather proof


filter kits available



aluminum



disposable

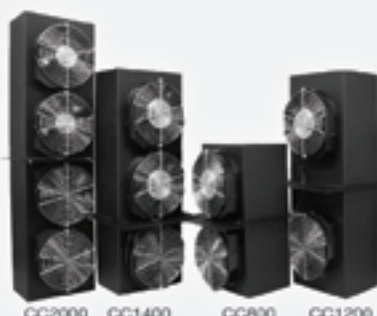

CC2000 CC1400 CC800 CC1200

Standard Models	Weight (lbs.)	Efficiency (Watts/°C)	Rating* (BTU/hr)	Amps @ 115V	Fan/size	Height	Width	Depth
-----------------	---------------	-----------------------	------------------	-------------	----------	--------	-------	-------

## DROP-IN MODELS\*

CC100	6	7.2	500	0.4	3-3.6"	11 5/8	4	4 1/2
CC200	6	16.5	1100	0.4	2-4"	11 1/2	5 1/8	4 5/8
CC500	11	35.2	2400	0.6	2-6"	15	7 3/4	7
CC800	16	55.2	3800	0.6	2-6"	15	7 3/4	7
CC1200	18	75.0	5100	0.6	2-6"	22	7 3/4	7
CC1400	20	75.0	5100	0.9	3-6"	22 1/2	7 3/4	7
CC2000	28	110.4	7500	1.2	4-6"	30	7 3/4	7



CC2500F CC1300F CC900F CC400F CC600F

## FLUSH MOUNT MODELS\*

CC254F	8	16.5	1100	0.4	2-4"	12 7/8	12	4
CC400F	10	20.4	1400	0.4	2-4"	22 1/2	6 1/4	4
CC450F	9	21.0	1400	0.4	2-4"	12 1/2	8	5 5/16
CC600F	14	49.2	3300	0.6	2-6"	30	8 3/4	4
CC900F	16	66.0	4500	0.6	2-6"	15	13 7/8	7 7/8
CC1300F	22	75.0	5100	0.6	2-6"	22	13 7/8	7 7/8
CC2500F	30	104.0	7100	1.2	4-6"	29	13 7/8	7 7/8
CC4000F	60	200.0	13700	2.4	8-6"	58	13 7/8	7 7/8



CC3060 CC2060 CC3260 CC6360

## BELOW AMBIENT - AIR TO WATER MODELS\*\*

CC2060	9	24.5	3300**	0.2	1-4"	22 1/2	6 1/4	4
CC3060	13	68.8	9300**	0.3	1-6"	30	8 3/4	4
CC3260	13	62.7	8600**	0.3	1-6"	13 7/8	12	7 7/8
CC6360/61	32	159.7	21800**	0.9	3-6"	29	13 7/8	8
CC9000	79	417.0	57000**	2.4	8-6"	70 1/2	23 3/4	8

**Stainless Steel Units Available**

\*Typical performance rating mounted to a metal uninsulated 72" x 36" x 24" cabinet at 20°C ΔT to ambient air temperature.

\*\* Same but using @ 40°C ΔT to coolant water temperature.



GSA GS-07F-0619W

**650.322.9500**  
 NORENPRODUCTS.COM/ccc